




- Compact and high resistant metal enclosure
- Circuit with rating 10A
- 1NO + 1NC or 2NO + 2NC
- Double Gap contacts
- Positive opening operation of NC contact 
- Long life mechanism
- Fool proof protection cover
- Cable entrance with Pg13.5 thread
- Screw terminal with retractable clamp
- Slide proof rubber feet





Circuitry





Specifications

Electrical Rating	10A 250Vca	
Contact Resistance	50 mΩ máximo inicial (em 1A 5Vcc)	
Ambient Temperature	+85°C maximum	
Degree of Protection	IP65 (EN 60529)	
Internal Switch	Circuit Form Zb (IEC 60947-5-1) with double gap: NO and NC contacts can be independent circuit With positive opening operation on NC Contact (IEC 60974-5-1): When the pedal is worked until your total course	
Mechanical Life Expectancy	10.000.000 cycles	
Electrical Life Expectancy	200.000 cycles	
Materials	Housing:	Painted Die Cast Aluminium
	Actuator:	Painted Die Cast Aluminium
	Cover::	Zinc Plated Steel
	Protection Cover:	Painted Die Cast Aluminium

Dimensions

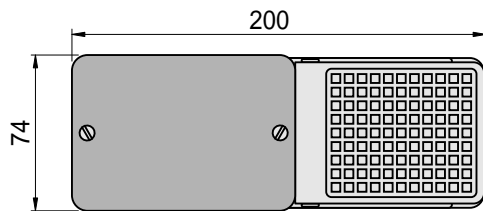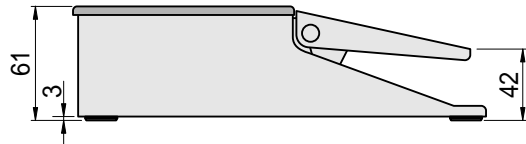

Foot Switch

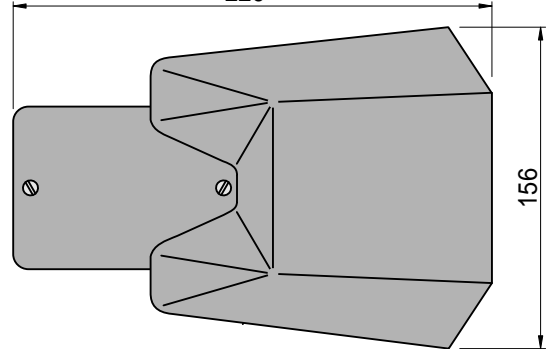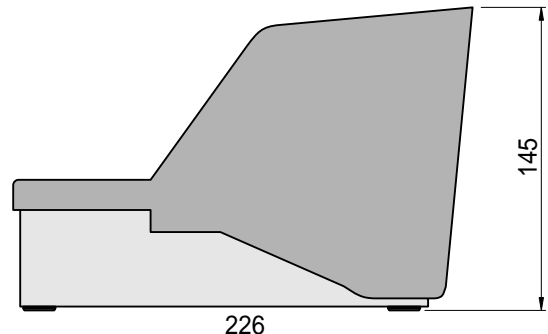

Foot Switch with Protection Cover

Subject to change without prior notice



Ordering Information

S F 1 C

Series

Internal Switches	
1 switch (1NO + 1NC)	= 1
2 switches (2NO + 2NC)	= 2

Protection Cover
without Protection = none
with Protection = C

<p>Switch for Replacement ME</p>  <p>Product CE</p>	<p>Cable Gland (See Catalog ZA)</p> 
---	---

Special Applications

The products presented in this catalog are models of regular commercial use, however we are able to develop "personalized" models for special applications.

Contact us.

