



- Compact joystickswitch for light services
- Four positions with return
- Uses miniature switch MV series
- Four changeover circuit with rating up to 15A
- Snap action contacts mechanism
- Quick connect (faston) weldable terminals
- Mecanical long life
- Round bezel for 22mm holes


Circuitries (IEC 60947-5-1)



Lever in Repose



Operated Lever



Specifications



Electrical Rating	15A 250Vca
Contact Resistance	50 mΩ maximum initial (at 1A 5Vdc)
Ambient Temperature	+70°C maximum
Mechanical Life Expectancy	500.000 cycles
Electrical Life Expectancy	200.000 cycles
Degree of Protection	IP65 (assembled on panel) (IP40: with miniature switch exposed) (EN 60529)
Materials	Enclosure: Thermoplastic
	Handle: Thermoplastic
	Lever: Zinc plated steel
	Terminals: Copper alloy
	Contacts: Silver alloy

Ordering Information

TC4

Dimensions

Dimensions in mm

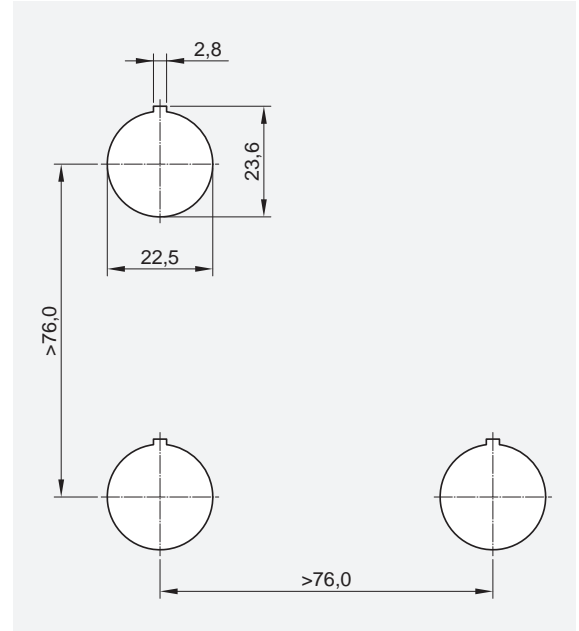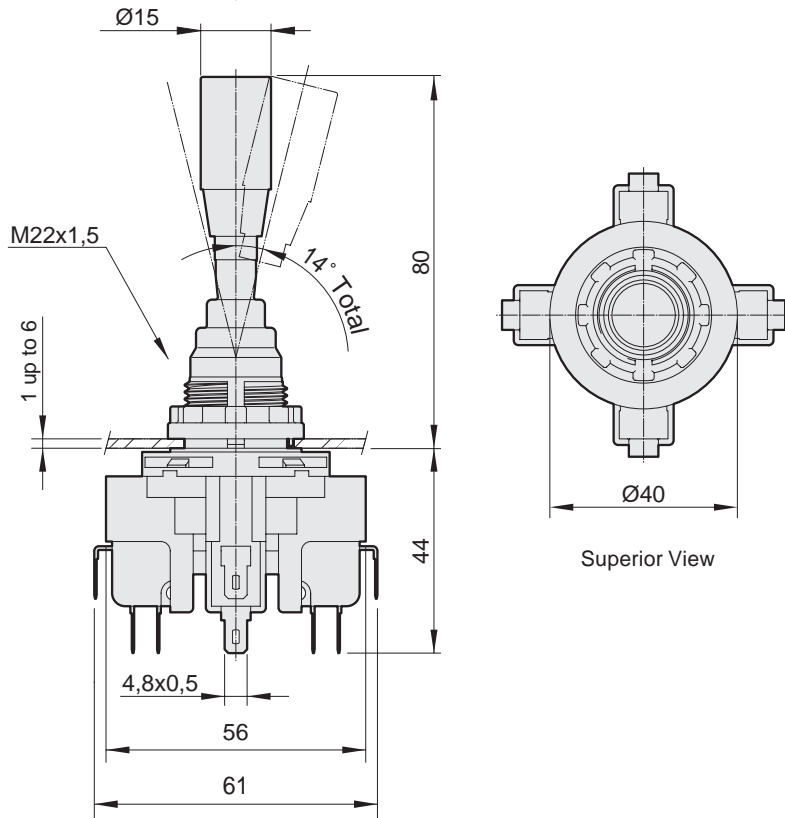

Fixing Dimensions

Subject to change without prior notice

Panel Assembling

Due to reduced dimensions, the industrial joystickswitch TC series, allows quick and easy assembling. The sealing cover goes trough the fixation hole, allowing the electric connection to be done before the assembling on the panel.

Accessories



Fixation Key **C5AX**



Legend Plates
C5AQM4

